


## SAM™ data sheet SAM-1550-40-x-10ps, $\lambda = 1550 \text{ nm}$

Laser wavelength	$\lambda = 1550 \text{ nm}$
High reflection band (R > 55%)	$\lambda = 1460 \dots 1600 \text{ nm}$
Absorbance	$A_0 = 40 \%$
Modulation depth	$\Delta R = 24 \%$
Non-saturable loss	$A_{ns} = 16 \%$
Saturation fluence	$\Phi_{sat} = 70 \mu\text{J}/\text{cm}^2$
Relaxation time constant	$\tau \sim 10 \text{ ps}$
Damage threshold	$400 \text{ MW}/\text{cm}^2$
Chip area	4mm x 4mm; other dimensions on request
Chip thickness	400 $\mu\text{m}$ ; optional: 150 $\mu\text{m}$ on request
Protection	the SAM is protected with a dielectric front layer
Mounting of SAM-1550-40-x	denotes the type of mounting as follows:
x = 0	unmounted
x = 12.7 g	glued on a gold plated Cu-cylinder with 12.7 mm $\varnothing$
x = 25.4 g	glued on a gold plated Cu-cylinder with 25.4 mm $\varnothing$
x = 12.7 s	soldered on a gold plated Cu-cylinder with 12.7 mm $\varnothing$
x = 25.4 s	soldered on a gold plated Cu-cylinder with 25.4 mm $\varnothing$
x = FC	mounted on a 1 m monomode fiber cable with FC connector

### Low intensity spectral reflectance and dispersion coefficient $D_2$

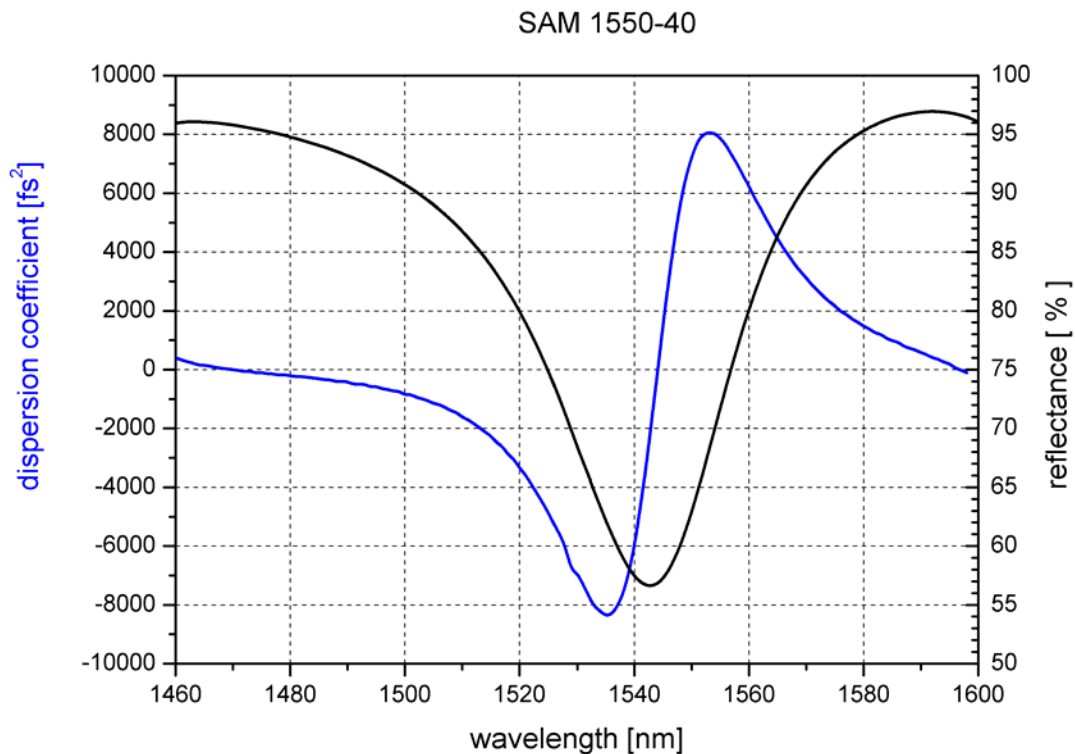

## Group Delay Dispersion (GDD)

Dispersion coefficient  $D_2(\omega) = \frac{\partial^2 \varphi}{\partial \omega^2}$

with  $\varphi$  - reflected phase

$$\omega = 2\pi \frac{c}{\lambda} \text{ - angular frequency}$$