



SA – Saturable Absorber




Product Overview


BATOP GmbH
Stockholmer Str. 14
07747 Jena
Germany

Phone: +49 3641 634009 - 0
URL: <http://www.batop.de>
e-mail: info@batop.de

- Saturable absorber for use in transmission applications
- For passive mode-locking of solid state, ring or fiber ring lasers

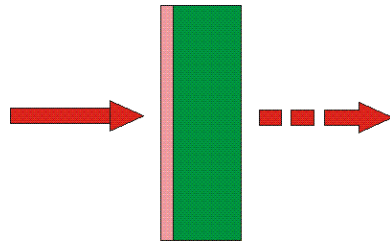

Mounting Options



12.7 mm \varnothing - Cu-Mount with \varnothing 4 mm hole



25.0 mm \varnothing - Cu-Mount with \varnothing 4 mm hole



Backside of 25.0 mm \varnothing - Cu-Mount with \varnothing 4 mm hole



Fiber coupled SA


SA 1020/1030	Laser wavelength Absorptance Relaxation time Saturation fluence	$\lambda = 980 \text{ nm} - 1040 \text{ nm}$ $A_0 = 34 - 40 \%$ $\tau \sim 500 \text{ fs} / 3 \text{ ps}$ $\Phi_{\text{sat}} = 300 \mu\text{J}/\text{cm}^2$
SA 1064	Laser wavelength Absorptance Relaxation time Saturation fluence	$\lambda = 1030 \text{ nm} - 1090 \text{ nm}$ $A_0 = 14 - 40 \%$ $\tau \sim 500 \text{ fs} - 37 \text{ ps}$ $\Phi_{\text{sat}} = 300 \mu\text{J}/\text{cm}^2$
SA 1340	Laser wavelength Absorptance Relaxation time Saturation fluence	$\lambda = 1300 \text{ nm} - 1460 \text{ nm}$ $A_0 = 22 \%$ $\tau \sim 20 \text{ ps}$ $\Phi_{\text{sat}} = 300 \mu\text{J}/\text{cm}^2$
SA 1550	Laser wavelength Absorptance Relaxation time Saturation fluence	$\lambda = 1400 \text{ nm} - 1600 \text{ nm}$ $A_0 = 6 - 58 \%$ $\tau \sim 2 - 20 \text{ ps}$ $\Phi_{\text{sat}} = 300 \mu\text{J}/\text{cm}^2$
SA 2000	Laser wavelength Absorptance Relaxation time Saturation fluence	$\lambda = 1900 \text{ nm} - 2100 \text{ nm}$ $A_0 = 1 - 43 \%$ $\tau \sim 10 \text{ ps}$ $\Phi_{\text{sat}} = 300 \mu\text{J}/\text{cm}^2$
SA 2800	Laser wavelength Absorptance Relaxation time Saturation fluence	$\lambda = 2500 \text{ nm} - 3000 \text{ nm}$ $A_0 = 10 \%$ $\tau \sim 10 \text{ ps}$ $\Phi_{\text{sat}} = 300 \mu\text{J}/\text{cm}^2$

For other wavelengths and parameters please ask!


- | | |
|------------------------|--|
| Chip area: | 5 mm x 5 mm |
| Chip thickness: | 625 μm semi – insulating GaAs, other thickness on request |
| Front side protection: | AR coating |
| Back side: | Polished and AR coated |
| Mounting: | <ul style="list-style-type: none"> ▪ Unmounted ▪ Glued on: <ul style="list-style-type: none"> ▪ 12.7 mm \varnothing Cu-mount with \varnothing 4 mm hole ▪ 25.0 mm \varnothing Cu-mount with \varnothing 4 mm hole ▪ Fiber coupled (SMF, PMF) ▪ Mounting on custom mounts on request |

Spectral transmission / absorption:


SA 1020-40-500fs-X

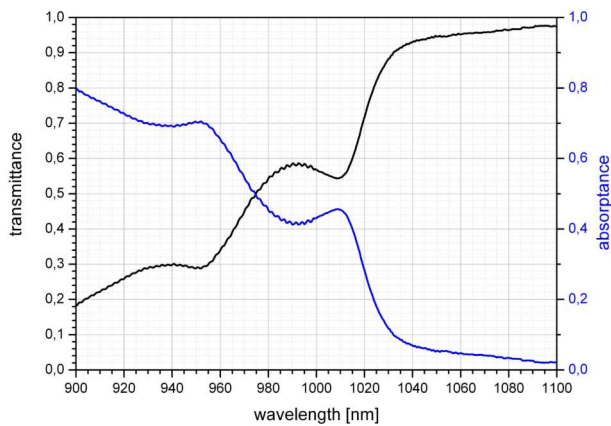


SA 1064-40-500fs-X

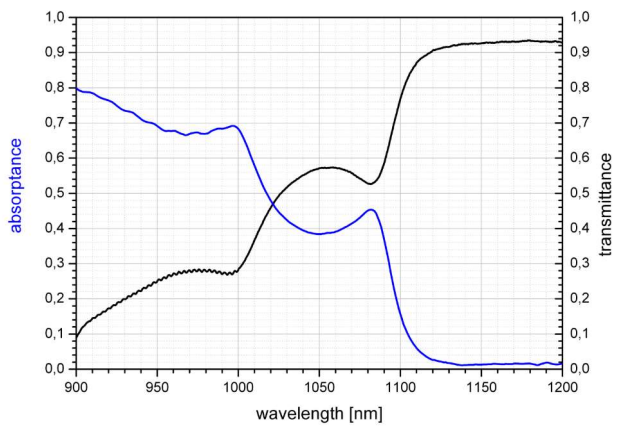

SA 1550-25-2ps-X

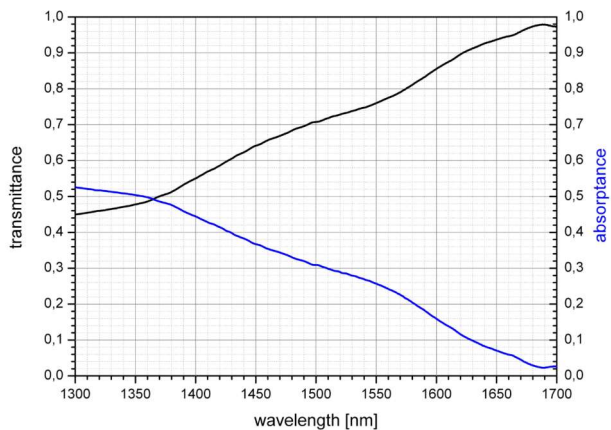

SA 2000-25-10ps-X

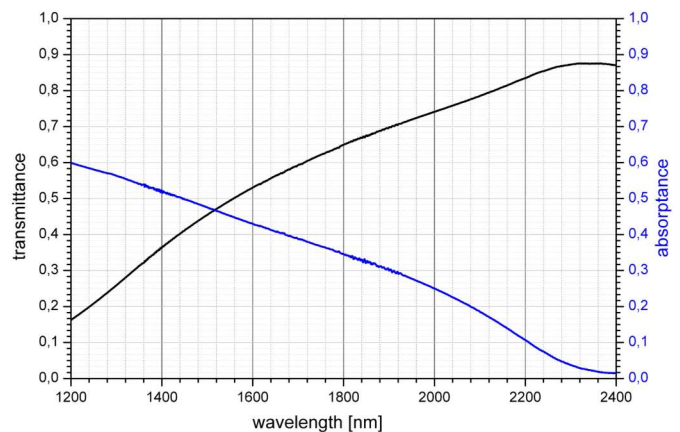

Notes: