

Mounted RSAM data sheet RSAM-λ-25.4g

GaAs chip area standard: 4mm x 4mm
 optional: other dimensions on request


Chip thickness standard: 400 μm

Front side the RSAM is covered by a dielectric front mirror.


The RSAM chip is glued on a gold plated Cu-cylinder with 25.4 mm Ø using a thermal conducting paste.

- The **standard** position of the RSAM is at the center of the mount.
- **Optional** the RSAM can be mounted on the edge of the mount without extra charges.

Center mounted RSAM

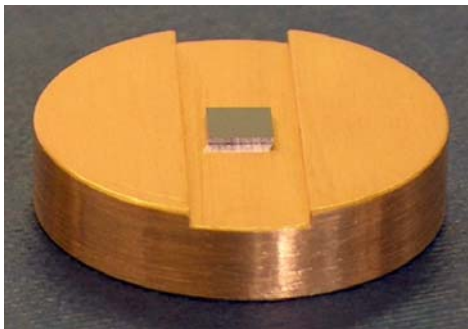

Edge mounted RSAM

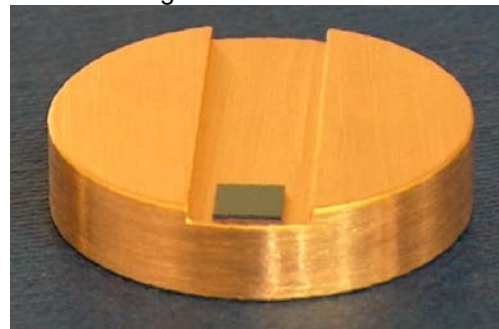

Mount

Cu-cylinder, Ø = 25.4 mm
 l = 6.0 mm

